

## Features

Most Preferred Best seller LED module : CE, UL, RoHS Certified Power Consumption : 0.72W LED provided by SAMSUNG SMD LED mounted : Made in Korea LED Driver : Constant Voltage Driving System Max. 50 modules in series Design of a new and unique CAP TYPE Optical Lens Each unit can be used to cut. Best Viewing Angle : **160°** 

## **Enhanced Function**


Stylish Appearance design : SHALLOW TYPE of Optical Lens Design for Humid & Waterproof : IP68 Easy Installation & Maintenance

## Applications

- \* Narrow size Channel letters
- \* Flex light Box illumination
- \* Duplex light Box illumination

## Dimension




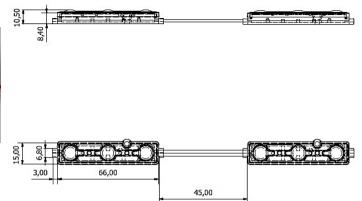

# Specification

Item	Value	Unit
Product No.	GOQ 3WS108 - 6500	
LED	5630 Samsung	
Power Consumption	0.72	Watt
Input Voltage	12	VDC
Input Current	60	mA
View Angle	160	0
Luminous intensity	115	lm(Typ.)
CRI	85	%
Module Pitch	45	mm
Size	66 X 15 X 10.5	mm
Weight	8	g
Max. in Series	50	EA
Operating Temp	- 30 ~ 85	°C
Storage Temp	- 40 ~ 100	°C
Waterproof	IP68	
Cable	UL, 20AWG 300V/80°C	
Case materials	UL, ABS, V0-class	
Lens materials	UL, SAN, V0-class	

# **Light Distribution Curve**

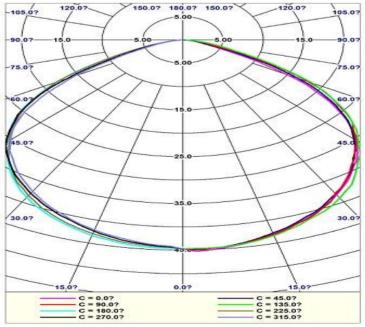



# **LED Specification**


### **Absolute Maximum Ratings**

Item	Symbol	Rating	Condition -		
Operating temperature range	T <sub>op</sub>	-40°C ~ +85°C			
Storage temperature range	T <sub>stg</sub>	-40°C ~ +120°C	-		
LED junction temperature	T,	110°C	- 1		
Forward Current	IF	150 mA	- 1		
Peak Pulsed Forward Current	I <sub>FP</sub>	300 mA	Duty 1/10 pulse width 10ms		
Thermal resistance	R <sub>th</sub> , j-s	16 c/W	Junction to solder point		
Assembly Process Temperature		260°C, < 10sec	<u>~~</u>		
ESD	N-1	5kV	НВМ		

#### Characteristics

Item	Unit	Nominal CCT	Product Code	Rank	Min	Тур	Max
Forward Voltage <sup>1)</sup> (Vr) (@65 mA, Ts = 25°C)	v	-	-	AZ	2.70	- <u></u>	2.80
				A1	2.80	े हा े	2.90
				A2	2.90	) <del>a</del> l	3.00
				A3	3.00	-	3.10
				A4	3.10	) <u>-</u>	3.20
Luminous Intensity <sup>2)</sup> (I <sub>v</sub> ) (@65 mA, Ts = 25°C)	Im	10000K	"WAAUSO	SO	24.0	5	31.5
Reverse Voltage (@5 mA, Ts = 25°C)	v	15	l <mark>L</mark>		0.7	-	1.2

Spectrum (Ts=25°C)

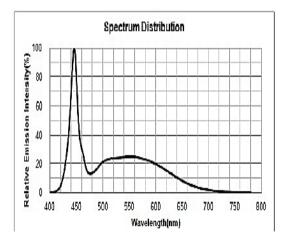

## **Radiation Characteristics**

