





### www.GOQLEDAmerica.com





### **Features**

Most Preferred Best seller LED module : CE, UL, RoHS Certified

Power Consumption: 1.08W LED provided by SAMSUNG

SMD LED mounted: Made in Korea

LED Driver: Constant Voltage Driving System

Max. 50 modules in series

Design of a new and unique CAP TYPE Optical Lens

Each unit can be used to cut.
Best Viewing Angle: **160°** 

### **Enhanced Function**

Stylish Appearance design: SHALLOW TYPE of Optical Lens

Design for Humid & Waterproof: IP68

Easy Installation & Maintenance


## **Applications**

- \* Narrow size Channel letters
- \* Flex light Box illumination
- \* Duplex light Box illumination

## **Dimension**








# **Specification**

Item	Value	Unit
Product No.	GOQ 3WS108 - 6500	_
LED	5630 Samsung	
Power Consumption	1.08	Watt
Input Voltage	12	VDC
Input Current	90	mA
View Angle	160	О
Luminous intensity	135	lm(Typ.)
CRI	80	%
Module Pitch	45	mm
Size	66 X 15 X 10.5	mm
Weight	8	g
Max. in Series	50	EA
Operating Temp	- 30 ~ 85	℃
Storage Temp	- 40 ~ 100	°C
Waterproof	IP68	
Cable	UL, 20AWG 300V/80℃	
Case materials	UL, ABS, V0-class	
Lens materials	UL, SAN, V0-class	

# **Light Distribution Curve**

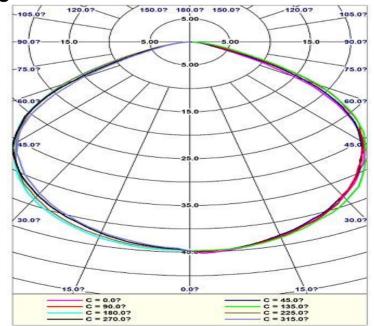



## **LED Specification**


#### **Absolute Maximum Ratings**

item	Symbol	Rating	Condition	
Operating temperature range	Тор	-40°C ~ +85°C	=	
Storage temperature range	T <sub>stg</sub>	-40°C ~ +120°C	<del>-</del>	
LED junction temperature	T,	110°C	_	
Forward Current	IF	150 mA	= -	
Peak Pulsed Forward Current	I <sub>FP</sub>	300 mA	Duty 1/10 pulse width 10ms	
Thermal resistance	R <sub>th.</sub> j-s	16°C/W	Junction to solder point	
Assembly Process Temperature		260°C, < 10sec	=	
ESD	l <del>o</del> s	5kV	НВМ	

#### Characteristics

Item	Unit	Nominal CCT	Product Code	Rank	Min	Тур	Max
Forward Voltage <sup>1)</sup> (Vr) (@85 mA, Ts = 25°C)	v	-	-	AZ	2.70	S F	2.80
				A1	2.80	· =	2.90
				A2	2.90	<del>-</del>	3.00
				A3	3.00	-	3.10
				A4	3.10	9	3.20
Luminous Intensity <sup>2)</sup> (I <sub>v</sub> ) (@65 mA, Ts = 25°C)	lm	10000K	'WAAUS0	S0	24.0	-	31.5
Reverse Voltage (@5 mA, Ts = 25°C)	v	-	15	1.7	0.7	-	1.2

### Spectrum (Ts=25 )

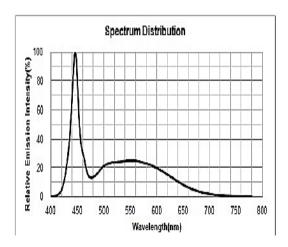

#### **Radiation Characteristics**

